



C 500 H
C 500 H x4



FullGrip® System exclusivo AUSA:
Tracción integral por discos múltiples conectable electro-hidráulicamente desde el mando joystick.

Exclusive AUSA FullGrip® System:
On demand 4WD connectable by means multiple discs with electro-hydraulic engagement from the joystick.

FullGrip® System de AUSA:
4 RM sur demande au moyen de disques multiples avec connexion electro-hydraulique depuis le joystick.

AUSA FullGrip® System:
Elektrohydraulisch, zuschaltbarer Allradantrieb – am Joystick zu betätigen.




C 500 H/x4_5000Kg



www.ausa.com

DIMENSIONS (mm)	C 500 H	C 500 Hx4
A	2335	2335
B	270	280
C	300	300
D	1640	1700
E	2000	2000
F	3560	4380
G	3050	3205
I	130	130
J	60	60
K	728	728
L	4623	4623
M	705	645
N	1990	2050
O	1200	1200
P	5680	6820

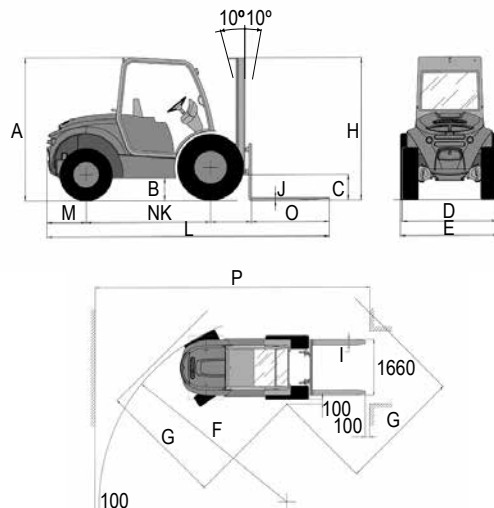

Type of mast	Maximum lifting height (mm)	Free lift (mm)	H Machine height with mast retracted (mm)	Machine height with mast extended (mm)	Load (Kg) at max. height according stability test standard (A/B)*	
			C 500 H C 500 Hx4	C 500 H C 500 Hx4	(A) C 500 H/Hx4	(B) C 500 H / Hx4 Version HI
Duplex (Std.)	3700	100	2750	4585	5000	5000
Duplex	4500	100	3150	5385	4800	5000
Triplex (free lift)	4250	1393	2350	5262	5000	5000
Triplex (free lift)	5450	1793	2750	6462	1500	4250
Triplex (free lift)	6800	2243	3200	7812	600	3000

TECHNICAL SPECIFICATIONS

		C 500 H	C 500 Hx4
Load capacity (Kg) @ Centre of gravity		5000 a 600mm	
Lifting height (Standard duplex mast) (mm)		3700	
Engine	Turbodiesel	Deutz TD 3.6 L4	
	Power acc/ SAE J 1995 (KW/HP)	55/75	
	N° of cylinders	4	
	Cooling system	Agua	
	Post combustion treatment technology	Diesel Oxidation Catalyst (DOC)	
Engine	Turbodiesel	KUBOTA V 3600-T (IDI)	
	Power acc/ SAE J 1995 (KW/HP)	63 / 85.6	
	N° of cylinders	4	
	Cooling system	Water	
Traction		4x2 with selflock limited slip differential in front axle	4x2 / 4x4 FullGrip®
Transmission		Hydrostatic with variable flow pump and automatic regulation Electric gear in joystick Inching pedal	
Unladen weight (Kg) (with full tanks)		7500	7600
Gradient negotiable (with full load)		30%	
Speed (Maximum) (Km/h)		20	
Engine starting system		Electric	
Tyres	Front	18-19.5 TL 16 PR (C500H / Hx4)	
	Rear	8.15-15 (C500H) - 10.0 / 75-15.3 (C500Hx4)	
Steering		Hydraulic. Working pressure 150 bar	
External turning circle (mm)		3560	4380
Tank capacity (l)	Fuel	120	
	Hydraulic fluid	95	
Service brake		Oil-immersed, multidisc, hydraulically driven	
Parking brake		Oil-immersed, multidisc, hydraulically driven	
Hydraulic circuit		30 - 10.6 cc. double gear pump	
Operating pressures for accessories (bar)		230+5	
Forkcarriage		FEM 4 - Width:1660 mm	
Stability test standard	(A)*	For rough terrain use – Models H – EN 1726-1; Annex H	
	(B)*	For industrial use – Models HI - ISO 1074	
STANDARD EQUIPMENT		Open and tilting cabin	
		Ergonomic and comfort seat with height, weight and distance adjustable with seat belt	
		Rear-view mirrors	
		Joystick with integrated functions	
		Rotating beacon	
		Audible reverse warning	
		3th auxiliary hydraulic service	
		Side-shift	
OPTIONAL EQUIPMENT		Semi-closed cabin	
		Closed cabin with heater	
		Air conditioning	
		Electronic anti-theft protection system	
		Radio/Stereo CD	
		Homologated lighting system	
		Catalytic converter	
		Spark arrestor	
		Limited slip differential in front axle (O nly mod. C 500 H Version HI)	
		4th auxiliary hydraulic service	
		5th auxiliary hydraulic service	
		600, 800 and 1000 l hydraulic buckets	
		Load backrest	
		Enhanced heater for Nordic countries	
		Many other attachments fitted with manufacturer warranty	

AUSA reserves the right to make any changes in the specifications without prior notice.